


# The New *light*-Class

## 4 SAT IF signals compact multiswitch with passive terrestrial

**NEW**


- excellent price / performance ratio
- passive terrestrial input
- for Quattro-LNB
- horizontal or vertical mounting possibilities due to new power supply housing
- high output level for long cable runs
- for 8, 12 or 16 subscribers



## 4 SAT IF signal compact multiswitch with passive terrestrial for 8 / 12 or 16 subscribers

### Features:

- passive terrestrial input
- appropriate to DVB-T
- CATV capable
- for quattro LNB
- high output level for long cable runs
- integrated energy saving switch-mode power supply
- excellent price / performance ratio

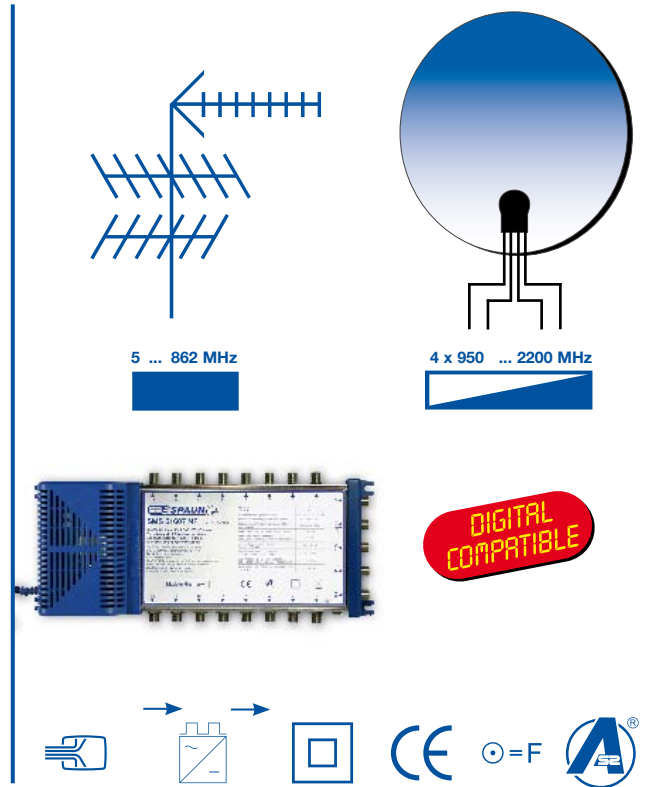

Modell Art. Nr.	SMS 5807 NF 842462	SMS 51207 NF 842463	SMS 51607 NF 842464
Inputs SAT / Terrestrial		5 4 / 1	
Outputs / Subscribers	8	12	16
Tap gain Terrestrial: 5 ... 862 MHz	-21 ... -16 dB	-24 ... -20 dB	-25 ... -21 dB
Tap gain SAT-ZF: 950 ... 2200 MHz	-1 ... +5 dB	-2 ... +4 dB	-4 ... +2 dB
Mains supply U~	100 ... 240 V / 50 ... 60 Hz		
Power consumption + LNB	7 W	8,5 W	10 W
max. LNB supply current	350 mA		
Maximum output level 950 ... 2200 MHz 35 dB IMA <sub>3</sub> / EN 50083-3	102 dBμV	100 dBμV	100 dBμV
Current consumption from each receiver	10 mA		
Isolation Rec. / Rec.: Terrestrial: / SAT:	≥ 26 dB		
Ambient temperature	-20 ... +50 °C		
Dimensions in mm	221 x 132 x 56	261 x 132 x 56	301 x 132 x 56